

4" Submersible pump A-TEC

Pumps are suitable for pumping clean water without solids or abrasive material.

Features:

- pump body from stainless steel
- suction grid from stainless steel
- shaft from stainless steel
- impellers from polypropylene
- mechanical seal
- cable 20 m H07RNF

Motor:



- motor submersible on oil bath cooled pumping liquid
- level of protection IP 68
- class insulation F
- single phase motor with control box
- self-lubricates bearings
- speed of rotation 2800 ot./min.

Use:

- type of liquid: clear water without solids and abrasive materials
- max. temperature of liquid: 35°C
- max. submersion under the level: 20 m
- max. number of switching: 30/hod

Application:

- pumping water from boreholes, wells
- building booster sets
- irrigation

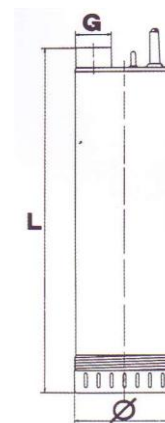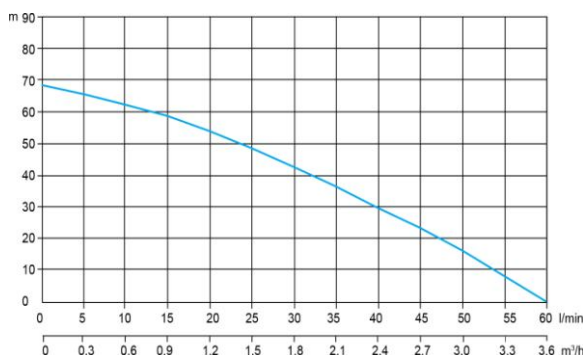

Code	TYPE	Q max l/hod	H max m	Input kW	Voltage V	Max. temperature	Dimensions mm			Weight kg
							G	Ø	L	
	A-TEC 60/65 M	3600	65	0,55	230	35°C	1"	104	670	13

