

Spindle pumps to boreholes KLASIK

Spindle pumps are suitable for pumping clean water, non-agresive and non-explosive liquid without solids. Suitable for irrigation, repumping and for assembly booster sets.

Features:





- pump body from grey cast-iron
- spindle from stainless-steel
- stator from steel- rubber

Motor:

- submersible motor 4"
- motor with casing from stainless-steel
- motor chlazený minerální olejovou náplní (pump with dip to 20m)
- flex cable 25 m

Use:

- type of liquid: clean, non-agresive, non-explosive, without solids
- max. temperature of liquid: 35°C
- number of switch: 20/1 hod.
- max. submersible under the level: 20 m

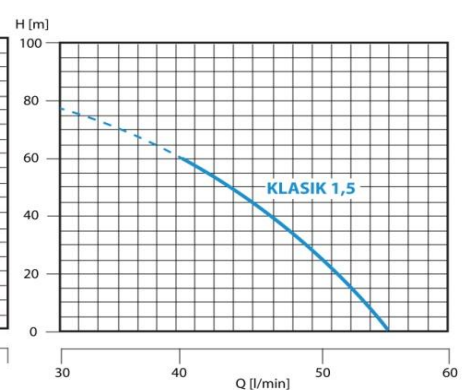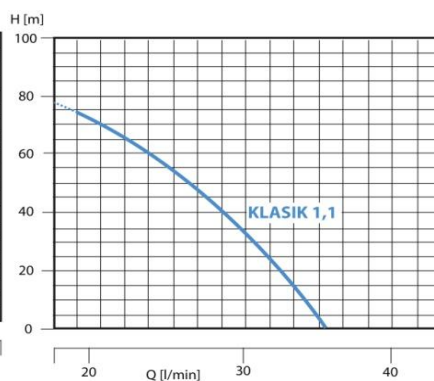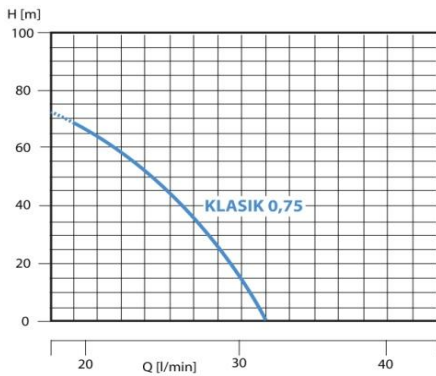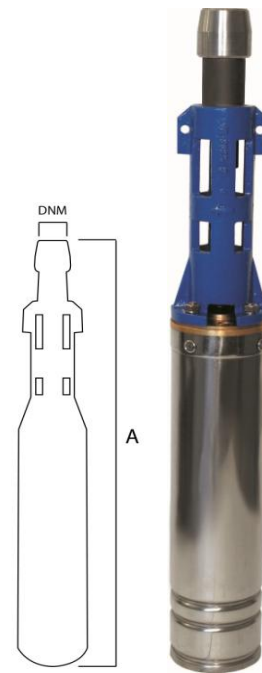

TYPE	Q max l/min	H max m	Input kW	Voltage v	Dimensions v mm			Weight kg
					A	ØC	DNM	
Klasik 0,75	32	72	0,75	400	686	96	1"	16
Klasik 1,1	36	78	1,1		690		1"	17
Klasik 1,5	55		1,5		750	5/4"	19	