

Separating polyethylene tanks are used to purify "gray" water. The tank operates on the principle of separation where wastewater with higher density (fats, oils, foams, etc.) remain in the container's front chamber. Due to sedimentation, thicker impurities can be captured.



## Construction characteristic

---

- made of high-density non-toxic linear polyethylene
- have a monolithic construction without critical points

## Usage


---

- serves to purify "gray" waters

## Technical parameters

---

- works on the principle of separation where higher density waste water (fats, oils, foams, etc.) remain in the front chamber of the container
- due to sedimentation, thicker dirt can be captured

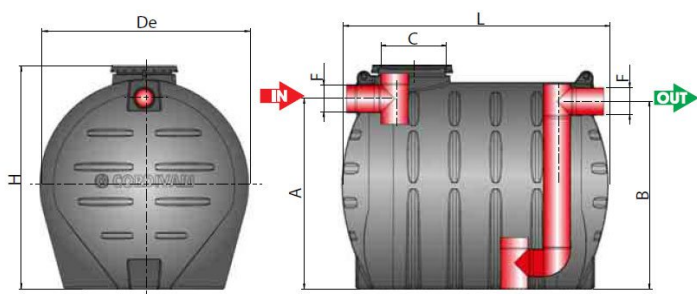

<b>Type:</b>	OM 3000
<b>L dimensions - lenght:</b>	1940 mm
<b>H dimensions - height:</b>	1624 mm
<b>A dimensions:</b>	1393 mm
<b>B dimensions:</b>	1353 mm
<b>C dimensions:</b>	470 mm
<b>F dimensions:</b>	160 mm
<b>Tank volume:</b>	3000 l
<b>Inlet size:</b>	470 mm

