

Fountain pumps with a 10 m connecting cable, with a washable filter, with two nozzles and a flow control valve for waterfall, cascade or stream. They are suitable for building fountains in garden ponds.



### Construction characteristic

- technopolymer pump body
- plastic impeller
- flushing algae filter
- 2 pc of nozzle
- removable filter cover

### Motor


- degree of protection IP 68
- speed 2850 rpm
- 10 m connecting cable

### Usage

- type of liquid: slightly polluted water
- max. pumped liquid temperature 35°C
- max height according to the used nozzle

### Aplikace

- residential fountains
- garden ponds
- do angličtiny češtiny němčiny water oxidation
- pump for filtrations

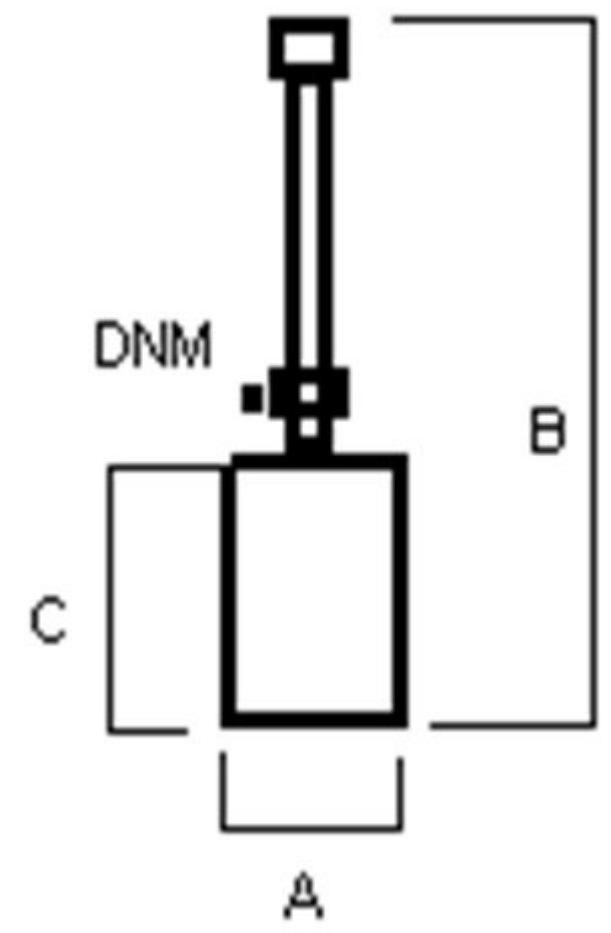

Type:	MANDY 16
Power input:	16 W
Q max:	1000 l/h
Head high:	1.7 m
Voltage:	230 V
Weight:	1,5 kg
Cable length:	10 m
A dimensions:	70 mm
B dimensions:	530 mm
C dimensions:	80 mm
DNM dimensions:	1/2"
Max. temperature:	35 °C
Nozzle:	FT3

