

Fountain pumps with a 10 m connecting cable, with a washable filter, with two nozzles and a flow control valve for waterfall, cascade or stream. They are suitable for building fountains in garden ponds.



Construction characteristic

- technopolymer pump body
- plastic impeller
- flushing algae filter
- 2 pc of nozzle
- removable filter cover

Motor


- degree of protection IP 68
- speed 2850 rpm
- 10 m connecting cable

Usage

- type of liquid: slightly polluted water
- max. pumped liquid temperature 35°C
- max height according to the used nozzle

Aplikace

- residential fountains
- garden ponds
- do angličtiny češtiny němčiny water oxidation
- pump for filtrations

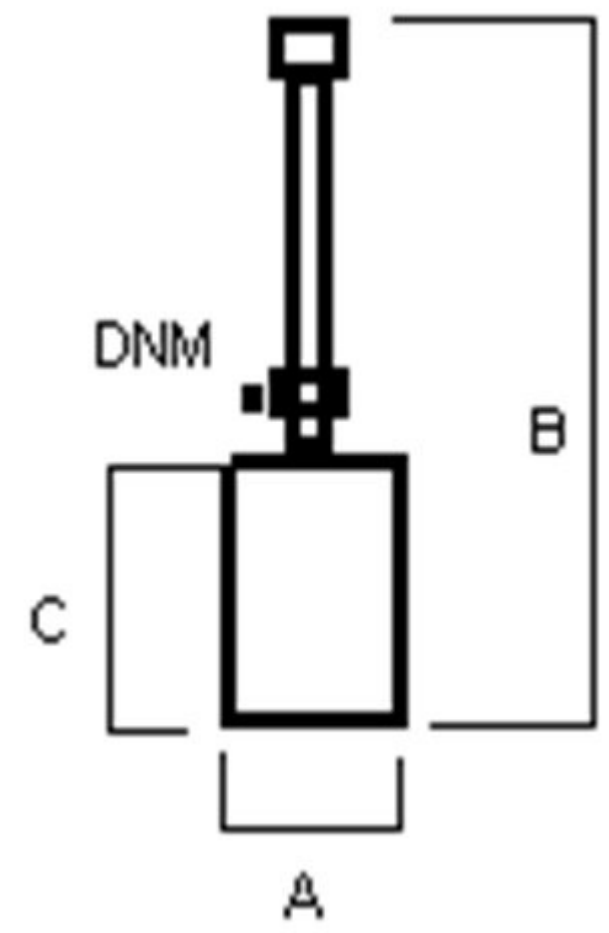

| | |
|-------------------|----------|
| Type: | MANDY 99 |
| Power input: | 100 W |
| Q max: | 5000 l/h |
| Head high: | 4 m |
| Voltage: | 230 V |
| Weight: | 4 kg |
| Cable length: | 10 m |
| A dimensions: | 110 mm |
| B dimensions: | 700 mm |
| C dimensions: | 135 mm |
| DNM dimensions: | 1/2"-1" |
| Max. temperature: | 35 °C |
| Nozzle: | FT5 |