

### Construction characteristic

---

- pump body of stainless steel AISI 304
- stainless steel displacement body
- AISI 304 stainless steel cable sleeve
- AISI 304 stainless steel filter
- stainless steel hanging eye
- Stainless steel impellers of AISI 304
- stainless steel diffusers with wear at the point of wear
- Stainless steel shaft AISI 303
- self-lubricating inlet bearing

### Motor

---

- 4" submersible motor
- oil cooling filling
- NEMA 4 "Flange
- degree of protection IP 68
- insulation class B
- speed 2850 rpm
- mechanical seal with sand protection

### Usage

---

- max. pumped liquid temperature 40°C
- number of switching times: 20/h
- minimum bore diameter 100 mm
- max. sand: 50 g/m<sup>3</sup>
- max. immersion 20 m

### Aplikace


---

- family houses, cottages, chalets
- pensions, hotels
- irrigation

### Accessory

---

- pressure vessel 35 lt
- cable 25 m
- 230 V control box or 400 V thermal fuse
- fitting, pressure gauge, check valve, pressure switch, connecting hose

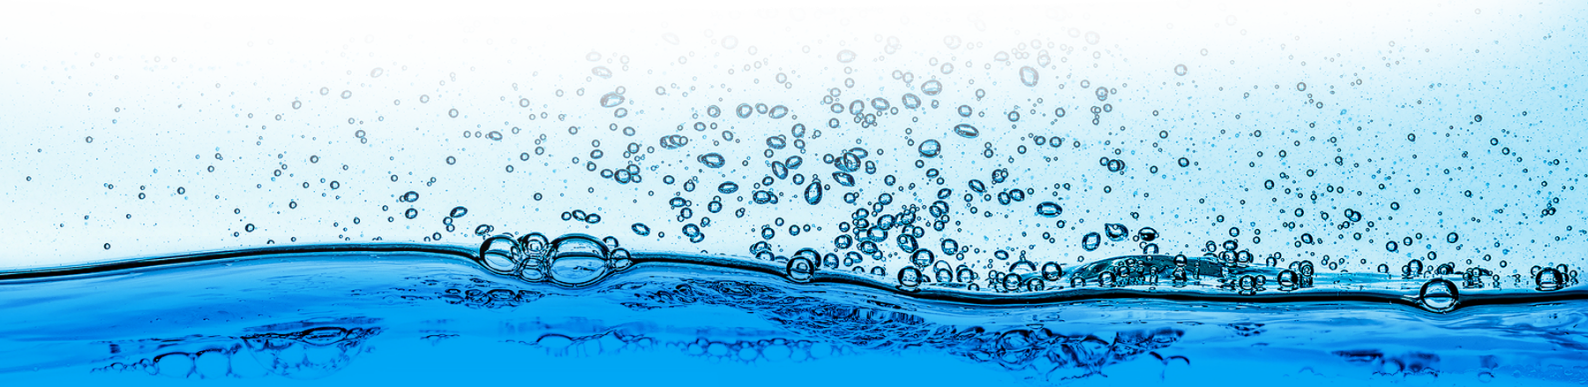

AQUACUP, s.r.o.  
Kollárova 969  
Veselí nad Moravou 698 01

Tel.: +420 572 591 800  
E-mail: [aquacup@aquacup.cz](mailto:aquacup@aquacup.cz)

[www.aquacup.cz](http://www.aquacup.cz)