



Automatic transfer pump for sewage and waste water, equipped with a BESTINOX 1500 double-sealing stainless steel pump.



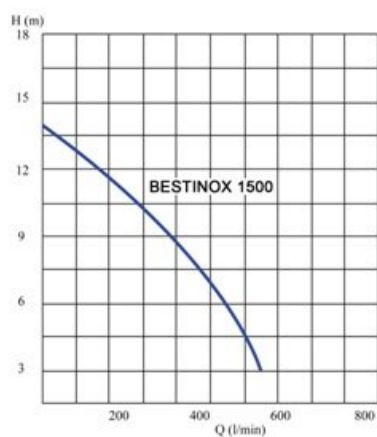

<b>Type:</b>	SUMOBX 500/Best Inox 1500
<b>Power input:</b>	1500 W
<b>Q max:</b>	500 l/h
<b>Head hight:</b>	14.5 m
<b>Voltage:</b>	230 V
<b>A dimensions:</b>	970 mm
<b>B dimensions:</b>	880 mm
<b>C dimensions:</b>	110 mm
<b>D dimensions:</b>	2" mm
<b>Connection:</b>	2"
<b>Max. temperature:</b>	40 °C
<b>Tank volume:</b>	500 l

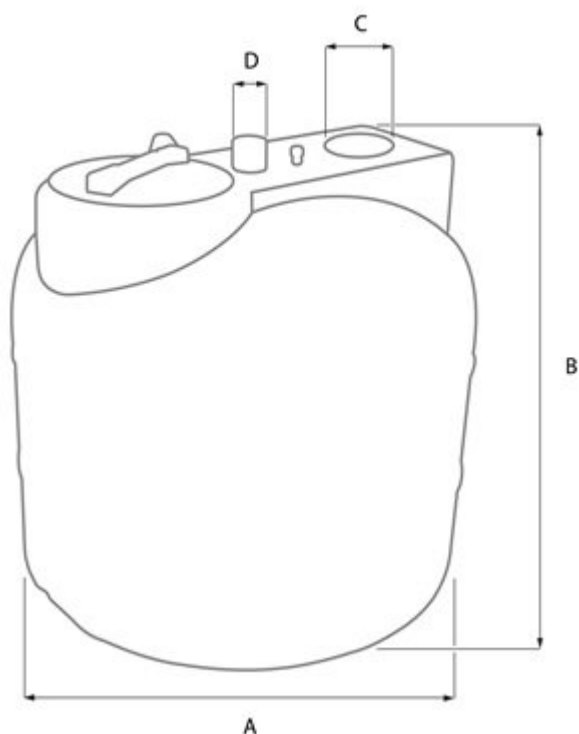