

Automatic booster sets with LP3 Inverter Pressure Switch to provide dry run protection. The booster sets are equipped with a multistage centrifugal pump.



## Construction characteristic

- stainless steel pump body
- suction and discharge parts made of cast iron
- distributor wheels made of technopolymer
- impellers from technopolymer
- Stainless steel shaft
- a mechanical seal made of graphite and a counterflange made of ceramics
- pressure vessel 24-100 lt
- pressure vessel bag of rubber

## Motor


- closed, chilled outside
- IPX4 protection
- insulation class F
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- speed 2850 rpm
- flexicable 1,5 m

## Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. suction height with 7 m backflow valve
- max. working pressure 6 bar

## Aplikace

- generational family houses
- pensions, small plants
- irrigation

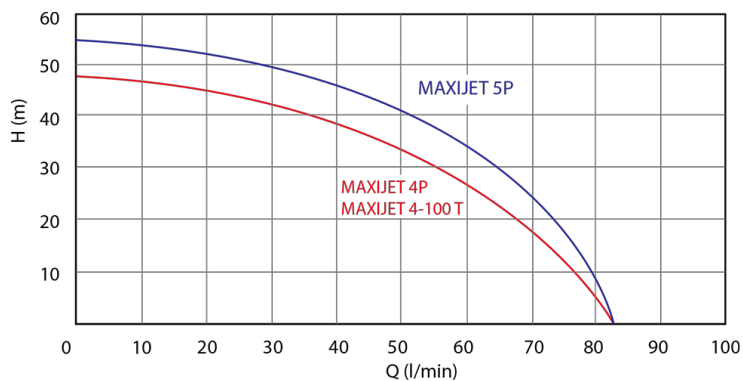



<b>Type:</b>	L 24
<b>Power input:</b>	1100 W
<b>Q max:</b>	6000 l/h
<b>Head height:</b>	48 m
<b>Voltage:</b>	230 V
<b>Weight:</b>	20,5 kg
<b>A dimensions:</b>	560 mm
<b>B dimensions:</b>	420 mm
<b>C dimensions:</b>	650 mm
<b>D dimensions:</b>	280 mm
<b>DNA dimensions:</b>	1"
<b>DNM dimensions:</b>	1"
<b>Max. temperature:</b>	40 °C
<b>ON/OFF Pressure:</b>	2 - 3,5 bar
<b>Tank volume:</b>	24 l
<b>Suction height:</b>	7 m
<b>Max. over pressure:</b>	6 bar