
FULL CONTROL MAXI - L 80

Automatic boostesert with LP3 Pressure Switch to provide dry run protection. The waterworks are equipped with a multistage centrifugal pump.



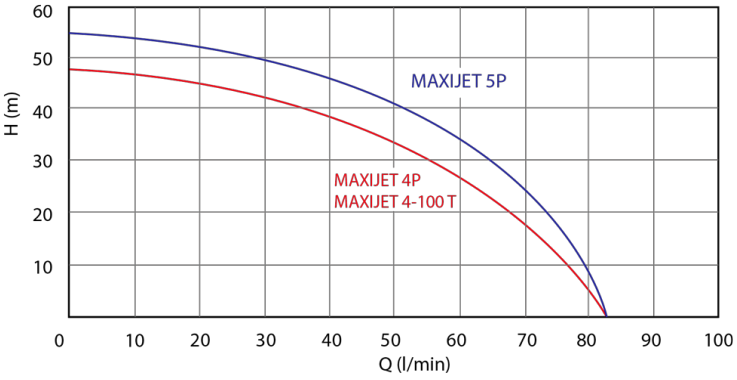

Construction characteristic

- stainless steel pump body
- suction and discharge parts made of cast iron
- distributor wheels made of technopolymer
- impellers from technopolymer
- Stainless steel shaft
- a mechanical seal made of graphite and a counterflange made of ceramics
- pressure vessel 24-100 lt
- pressure vessel bag of rubber

Motor

- closed, chilled outside
- IPX4 protection
- insulation class F
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- flexicable 1,5 m
- speed 2850 rpm


Usage

- speed 2850 rpm
- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. suction height with 7 m backflow valve
- max. working pressure 6 bar


Aplikace

- generational family houses
- pensions, small plants
- irrigation

FULL CONTROL MAXI - L 80

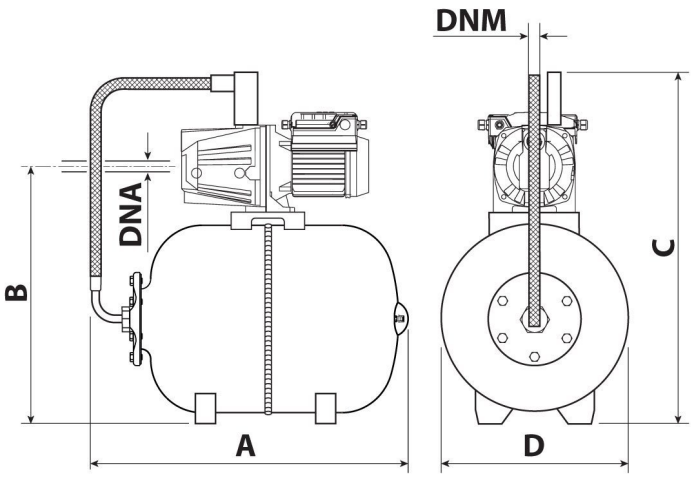

Type:	L 80
Power input:	1100 W
Q max:	6000 l/h
Head hight:	48 m
Voltage:	230 V
Weight:	27,5 kg
A dimensions:	720 mm
B dimensions:	560 mm
C dimensions:	790 mm
D dimensions:	410 mm
DNA dimensions:	1"
DNM dimensions:	1"
Max. temperature:	40 °C
ON/OFF Pressure:	2 - 3,5 bar
Tank volume:	80 l
Suction height:	7 m
Max. over pressure:	6 bar

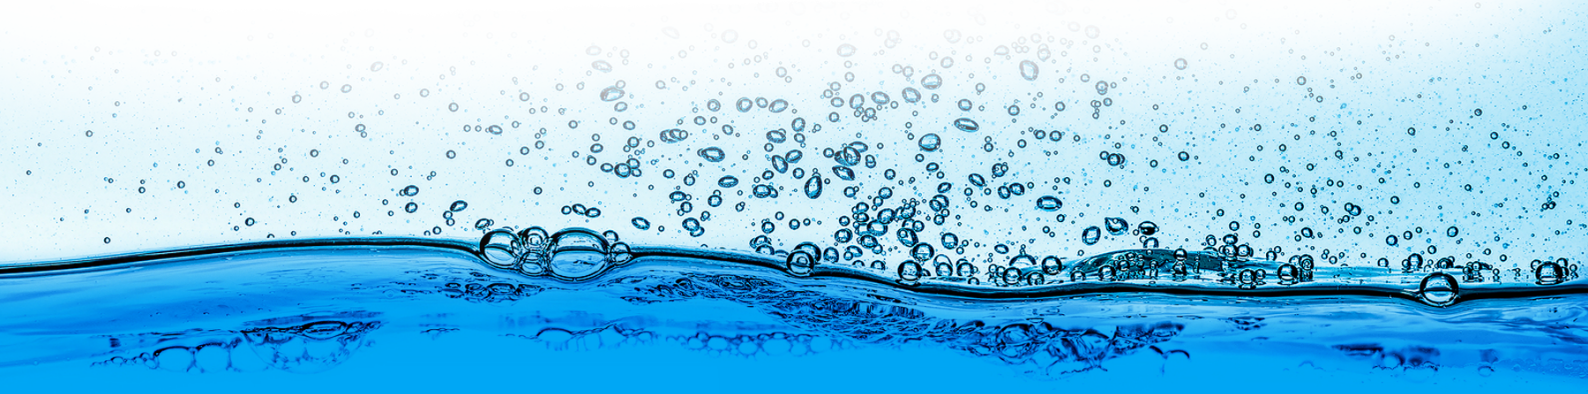

AQUACUP, s.r.o.
Kollárova 969
Veselí nad Moravou 698 01

Tel.: +420 572 591 800
E-mail: aquacup@aquacup.cz

www.aquacup.cz