
MAXIJET 4P

Pumps suitable for pumping clean water without solid additives and abrasive material.



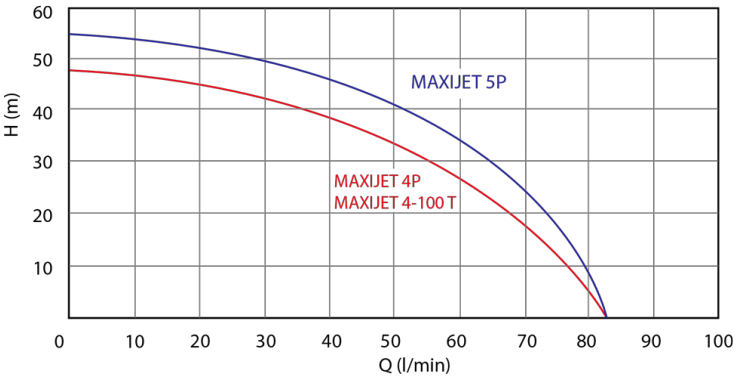

Construction characteristic

- pump body of stainless steel AISI 304
- circulating and distributing wheels of technopolymer
- suction and discharge parts made of cast iron
- Stainless steel shaft
- a mechanical seal made of graphite and a counterflange made of ceramics

Motor

- closed, chilled outside
- IPX4 protection
- insulation class F
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- speed 2850 rpm


Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. suction height with 7 m backflow valve
- max. working pressure 6 bar

Aplikace

- pressure devices
- Booster setst
- irrigation
- car washes

MAXIJET 4P

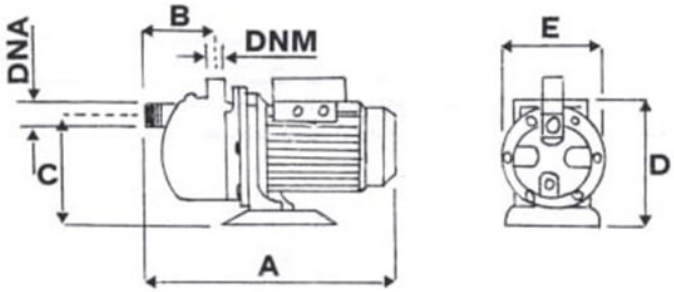

Type:	4P
Power input:	1100 W
Q max:	5400 l/h
Head hight:	48 m
Voltage:	230 V
Weight:	14 kg
A dimensions:	420 mm
B dimensions:	210 mm
C dimensions:	160 mm
D dimensions:	180 mm
E dimensions:	175 mm
DNA dimensions:	1" F
DNM dimensions:	1" F
Max. temperature:	40 °C
Suction height:	7 m
Max. over pressure:	6 bar

AQUACUP, s.r.o.
Kollárova 969
Veselí nad Moravou 698 01

Tel.: +420 572 591 800
E-mail: aquacup@aquacup.cz

www.aquacup.cz