

Construction characteristic

- pump alternation or simultaneous operation as required
- dry running protection
- timer function (adjustable from 0 to 180 ")
- pumps controlled by two frequency converters with adjustable calibration

Motor

- economical motor IE 3

Usage


- overpressure systems
- cleaning systems
- hotels, guesthouses, small and medium-sized manufacturing plants, car washes, apartment buildings ...

Aplikace

- the advantage is significant energy savings
- extending pump life via rotation

Technical parameters

- maximum flow 21 m³/h
- max. height 70 m
- max. working pressure 8 bar
- degree of protection IP 55
- max. operating temperature 40°C

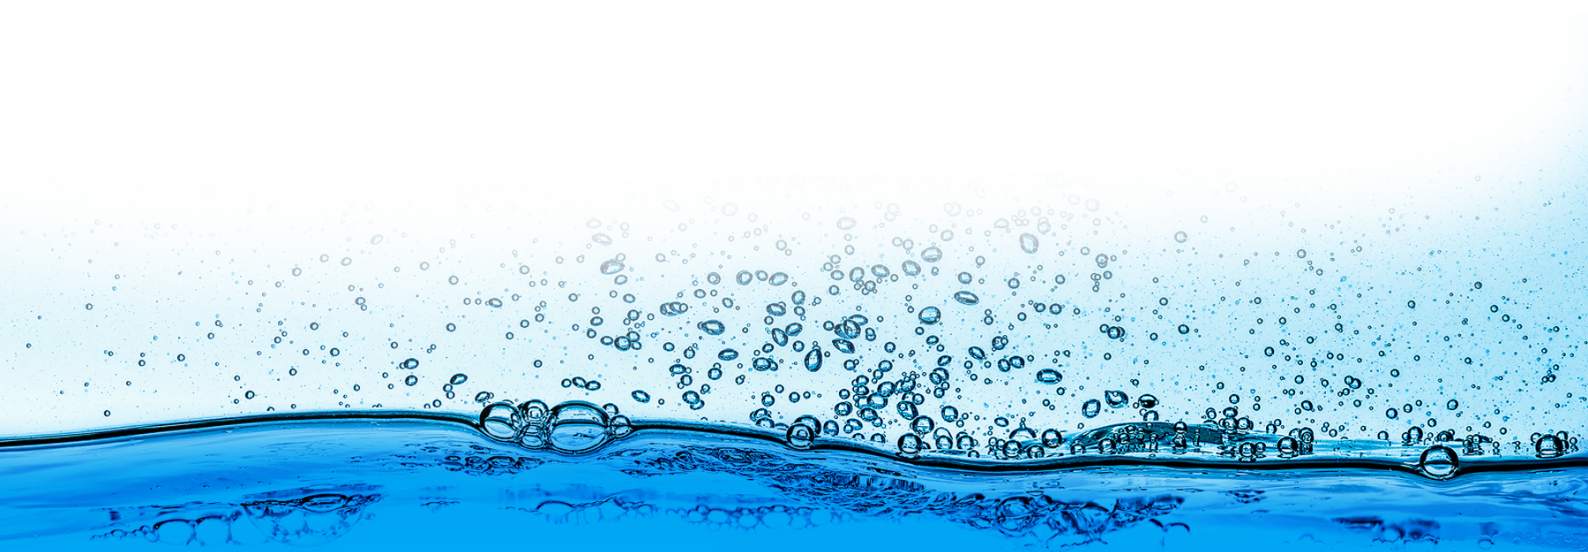

AQUACUP, s.r.o.
Kollárova 969
Veselí nad Moravou 698 01

Tel.: +420 572 591 800
E-mail: aquacup@aquacup.cz

www.aquacup.cz