
VERSAILLES 350/12



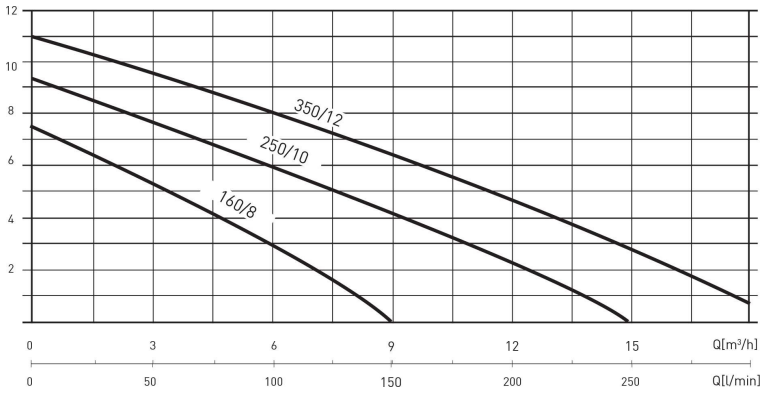

Construction characteristic

- AISI 304 suction strainer
- pump foot of stainless steel AISI 304
- pump body of stainless steel AISI 304
- Stainless steel impellers of AISI 304
- power cable 10 m H07RN-F with plug
- double seal
- Stainless steel motor shaft AISI 316 with ceramic insert at wear point

Motor

- dry-run motor with stainless steel body
- degree of protection IP 68
- insulation class F
- single phase version with built-in condenser and thermo protection in motor winding
- the electrical installation chamber is completely insulated
- self-lubricating bearing
- speed 2850 rpm
- designed for continuous operation

Usage

- type of liquid: clean water without solid impurities
- max. pumped liquid temperature 40°C
- max. immersion 7 m
- maximum particle size 1.5 mm
- we recommend installing a sponge filter for ideal pump operation


Aplikace

- fountains
- water games
- waterfalls in gardens


Accessory

- VULCANO nozzle: three adjustable streams
- GAISER nozzle: one adjustable spring with foaming effect
- BELL nozzle: adjustable bell tower

VERSAILLES 350/12

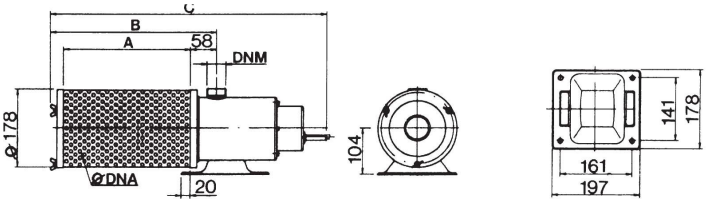

Type:	VERSAILLES 350/12
Power input:	800 W
Q max:	19200 l/h
Head hight:	11 m
Voltage:	230 V
Weight:	9,3 kg
Cable length:	10 m
A dimensions:	285 mm
B dimensions:	372 mm
C dimensions:	620 mm
DNM dimensions:	1 1/4"

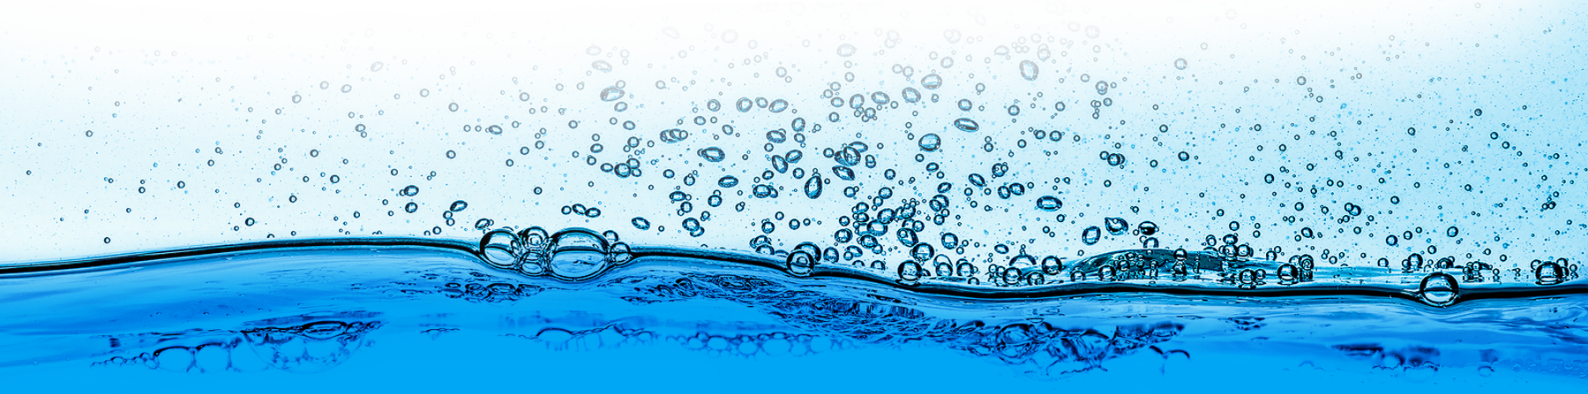

AQUACUP, s.r.o.
Kollárova 969
Veselí nad Moravou 698 01

Tel.: +420 572 591 800
E-mail: aquacup@aquacup.cz

www.aquacup.cz