

Separating polyethylene tanks are used to purify "gray" water. The tank operates on the principle of separation where wastewater with higher density (fats, oils, foams, etc.) remain in the container's front chamber. Due to sedimentation, thicker impurities can be captured.



Construction characteristic


- made of high-density non-toxic linear polyethylene
- have a monolithic construction without critical points

Usage

- serves to purify "gray" waters

Technical parameters

- works on the principle of separation where higher density waste water (fats, oils, foams, etc.) remain in the front chamber of the container
- due to sedimentation, thicker dirt can be captured

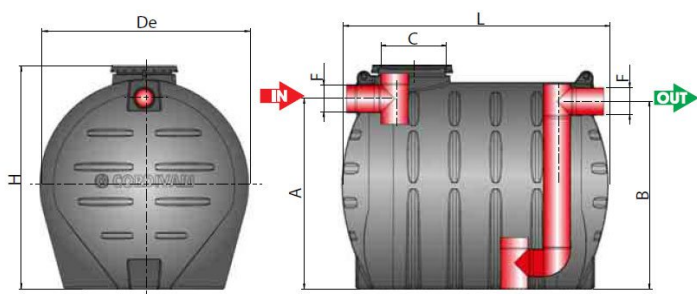

Type:	OM 5000
L dimensions - lenght:	2110 mm
H dimensions - height:	1967 mm
A dimensions:	1737 mm
B dimensions:	1687 mm
C dimensions:	470 mm
F dimensions:	200 mm
Tank volume:	5000 l
Inlet size:	470 mm

